

N 90, BUILT-IN COMPACT OVEN WITH STEAM FUNCTION, 60 X 45 CM, GRAPHITE-GREY C24FT53G0B


A⁺


Included accessories

1 x grid, 1 x universal pan, 1 x steam container, size XL, punched, 1 x Steam container, unpunched, size M

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated, Z11AU15A0 Universal pan, non-stick ceramic coated, Z11CR10X0 Baking and roasting grid (standard), Z11GT10X3 Glass roasting dish, 5,4l, Z11GU20X0 Glasspan, Z11SZ00X0 SeamlessCombination mounting kit, Z11SZ60G0 SeamlessCombination 45 + 14cm, Z11SZ90G0 SeamlessCombination 60 + 45cm, Z12CB10A0 Baking tray, anthracite enamelled, Z12CM10A0 Moussaka pan, anthracite enamelled, Z12CP10A0 Pizza pan, anthracite enamelled, Z12CU10A0 Multipurpose pan, anthracite enamelled, Z13CR10X0 Baking and roasting grid (steam), Z13CV05S0 Cover Strip, Z13CV06S0 Decor strip, Z1608DX0 Full ext rails, level independent, steam, Z1650BE0 Half tray, Z1650DU0 2 steamcontainer(punched/unpunched)sizeM, Z1655CA0 Air Fry & Grill tray, anthracite

Compact oven Intensive Steam - quick steaming keeps your favourite dishes full of flavour and nutrients. Multipoint Meatprobe with forecast function. Home Connect - control your oven via the App.

- ✓ Premium 6,8" Full Touch TFT Display - Easy to use and intuitive interface for maximum comfort and control.
- ✓ Intensive Steam - Healthy steaming keeps your favourite dishes full of flavour and nutrients.
- ✓ Steam Boost - Fill your oven with steam quickly for ultimate flavour and texture.
- ✓ Eco Clean with Base Clean - the duo that makes oven cleaning easier
- ✓ Multipoint Meatprobe - The three-point thermometer for delicious roasts done how you like!

Features

Technical Data

Construction type: Built-in
 Door opening: Drop down
 Min. required niche size for installation (HxWxD): 450-455 x 560-568 x 550 mm
 Dimensions: 455 x 596 x 548 mm
 Dimensions of the packed product (HxWxD): . 530 x 660 x 690 mm
 Control Panel Material: Stainless steel
 Door Material: Glass
 Net weight: 35.3 kg
 Length of electrical supply cord: 150.0 cm
 EAN code: 4242004266464
 Fuse protection: 16 A
 Voltage: 220-240 V
 Plug type: no plug (electrical connection by electrician)
 Number of cavities (2010/30/EC): 1
 Usable volume (of cavity) - NEW (2010/30/EC): 47 l
 Energy efficiency rating: A+
 Energy consumption per cycle conventional (2010/30/EC): 0.73 kWh/cycle
 Energy consumption per cycle forced air convection (2010/30/EC): 0.61 kWh/cycle
 Energy efficiency index (2010/30/EC): 81.3 %
 Included accessories: 1 x grid, 1 x universal pan, 1 x steam container, punched, size XL, 1 x Steam container, punched, size M, 1 x Steam container, unpunched, size M



4 242004 266464

N 90, BUILT-IN COMPACT OVEN WITH STEAM FUNCTION, 60 X 45 CM, GRAPHITE-GREY C24FT53G0B

Features

Design

- Graphite-Grey Edition
- Touch control
- Cavity inner surface: enamel anthracite

Features

- Compact steam oven with 22 heating methods: Top/bottom heat, Full surface grill, Centre surface grill, Bread baking, Bottom heat, Low temperature cooking, Plate warming, Keep warm, Conventional heat gentle, Steaming, Reheat with steam, Dough proving, Defrost, Circo-roasting, Bread Baking Setting, warming, 4D Hot air, Top/bottom heat
- HomeConnect ready on WLAN
- Oven Assistant with Voice Control
- Control panel lock
- Automatic safety switch off Residual heat indicator Start button Door contact switch
- Full glass inner door

Programmes/functions

- Temperature range 40 °C - 250 °C
- LED light, On/off button
- Electronic clock timer
- Drop down door, SoftClose, soft opening
- Water tank empty indicator
- Location of water tank: Outside cavity
- Heat reflective glass
- Triple glazed door glazed CoolTouch door
- Temperature proposal
- Actual temperature display Heating up indicator Temperature probe
- cookControl Plus
- Rapid heat
- steam boost - add for 3min intensive steam with a touch of a button.
- There are different steam intensities selectable: steam level high, steam level middle, steam level low
- Cooling fan
- Stainless-steel fan

Level independent telescopic rails

- 3 shelf positions
- Available as an accessory

Cleaning

- EcoClean Direct: coating of ceiling, back panel, side liners
- EcoClean programme, Base Clean programme

Accessories

- 1 x Steam container, punched, size M, 1 x steam container, punched, size XL, 1 x Steam container, unpunched, size M, 1 x grid, 1 x universal pan

Performance/technical information

- Power cord length 150 cm Cable length

- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.3 KW
- Energy efficiency rating (acc. EU Nr. 65/2014): A+
- Energy consumption per cycle in conventional mode:0.73 kWh
- Energy consumption per cycle in fan-forced convection mode:0.61 kWh
- Number of cavities: Main cavity Heat source: electrical Cavity volume:47 litre
- Appliance dimension (hxwxh): 455 mm x 596 mm x 548 mm
- Niche dimension (hxwxh): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

Dimensioned drawings

Technical drawing showing the dimensions for the built-in oven installation. The drawing includes a side view of the oven unit and a front view of the oven unit.

Side View Dimensions:

- Top width: 560⁺⁸
- Top depth: 180
- Min. height: min. 460
- Min. depth: min. 550
- Depth offset: 20

Front View Dimensions:

- Top width: 405
- Top depth: 21
- Height: 455
- Depth: 442
- Max. depth: max. 45
- Width: 596
- Depth: 548
- Height: 407

Space for appliance connection: 320 x 115

The drawing consists of two parts. The left part is a side elevation of a kitchen unit door. It shows a door with a width of 548 mm and a height of 455 mm. The door is shown in a closed position, with a 13 mm gap at the top and a 7.5 mm gap at the bottom. A dashed circle labeled 'Detail A' indicates the pivoting range of the door. The right part is a detailed view of 'Detail A', showing the door's pivoting mechanism. It includes a vertical dimension of 75 mm for the door's height and a horizontal dimension of 21 mm for the door's width. The pivoting range is indicated by a dashed arc with a minimum of 2° and a maximum of 40°. A note 'Area for kitchen unit door with handle or worktop' points to the door's surface. The bottom part of the drawing shows the 'Kitchen unit carcass front edge' with a horizontal dimension of 15 mm and a vertical dimension of 21 mm. The bottom edge of the door is shown with a horizontal dimension of 70 mm and a vertical dimension of 65 mm. The bottom right corner of the drawing includes the text 'measurements in mm'.

Note the pivoting range of the fascia.

measurements in mm

Technical drawing of the built-in oven showing front and side views with dimensions in mm.

Front View Dimensions:

- Top width: 405
- Top depth: 21
- Left height: 455
- Right height: 407
- Bottom width: 596
- Bottom depth: 548
- Right side height: 442
- Max. depth: max. 45

Side View Dimensions:


- Top width: min. 550
- Top depth: 35
- Height: 450⁺⁵
- Internal width: 35
- Internal depth: 60
- Bottom width: 560⁺⁸

Space for appliance connection 320 x 115

measurements in mm

Dimensioned drawings

Installation with a hob.

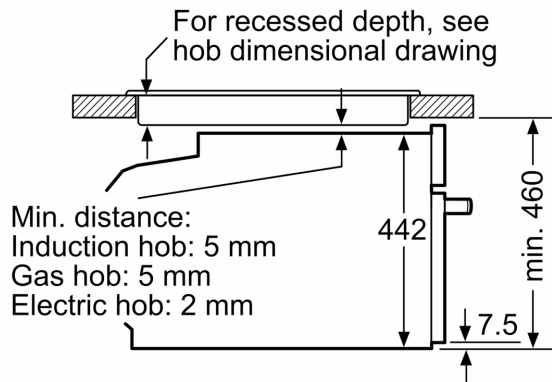

measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm